


Model	Power (W)	Led Brand / Type	Beam Angle	Lumen (Lm) 3000K/4000/6000K	Dimension (mm)	Output AC	Driver	Finish
EL-4086CCT	30W	Epistar 2835	100 Deg	+/- 3000	1200*40*H86	200-240V	Boke	Black /White

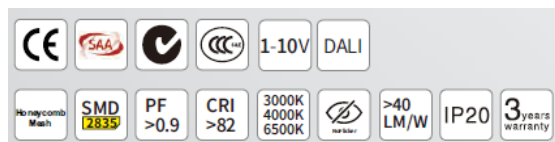


FEATURES :

- Low glare with honeycomb diffuser
- Relatively simple design concept which can be used in many lighting applications
- Joinable to required length
- Beam down with equally even light distribution. Enhanced PCB Board which are replaceable.
- Passed blue light hazard test that may be harmful to retina.
- Built in Led driven by reliable 50,000 hrs life span Boke, flicker free driver to reduce eye strains, headaches, migraine that can be aggravated by flickers.

APPLICATIONS

Ideal for homes, schools, offices, walkways, gym, supermarkets

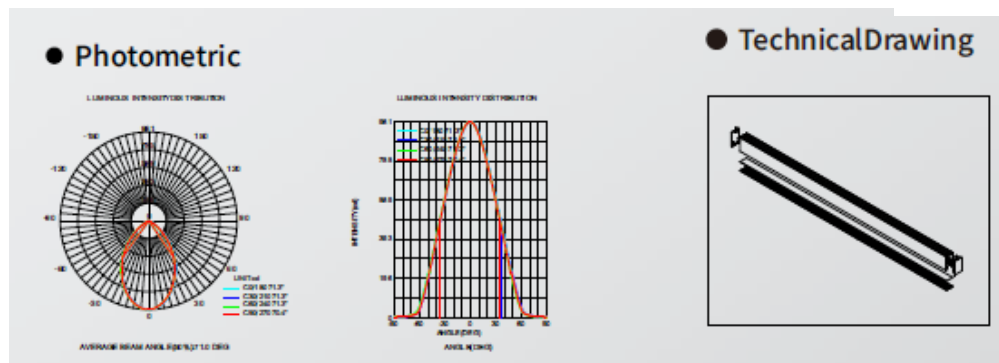

JOINING IS OPTIONAL

