

eluminuz<sup>®</sup>

**It's Different**

**CONSISTENT  
PERFORMANCE**



## LED BULBS

GU10

PAR 20

PAR 30

G4

G9

GX 53

T BULB High Power

AR 111



**eluminuz®**



**IT'S DIFFERENT**

**Long lifespan, 3 lens angle (15/25/35°) to choose for varied light output effect. Enclosed fitting application and dimming available**

**GU 10 LED / 5W / 7W / 7W Dim**

**Base : GU10**

**Voltage : 185-264/50 Hz**

**Dimension :50x50mm**

**Life time : 50,000 hrs (\*25,000 hrs for 15Deg)**


**IP20, CRI 80, PF 0.5**

**Packaging/ctn :**

**100pcs, 4.39kg, 0.023cbm**



Built for Consistent Performance

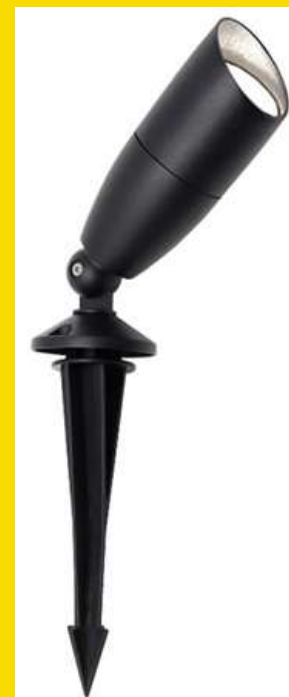

GU10/5W E is suitable to be used in enclosed fitting.

# eluminuz®

## EL-K-GU10-7W-15D

7W, 15 degree, 500lm, Non Dimmable


COB, Life time : 25,000 hrs\*

CCT ; 3000K

## EL-K-GU10-7W-25D

7W, 25 degree, 630lm, Non Dimmable


CCT ; 3000K, 4000K

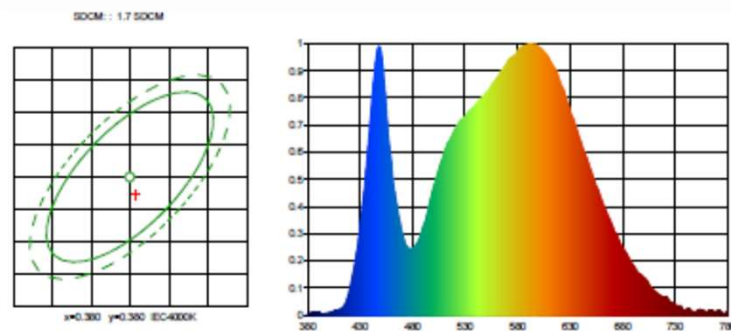

## EL-K-GU10-7W-35D

7W, 35 degree, 630lm, Non Dimmable

CCT ; 3000K, 4000K

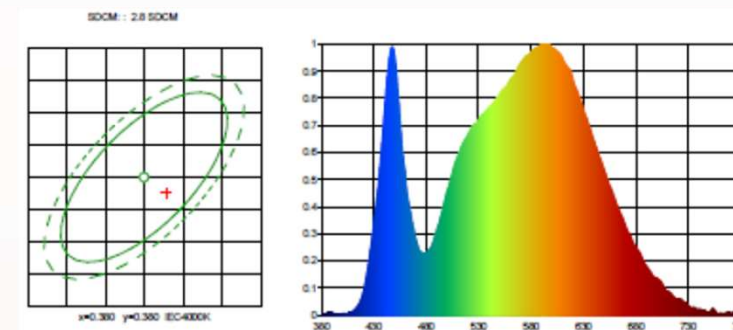


## EL-K-GU10-7W-35D-DIM

7W, 35 degree, 630lm, Dimmable

CCT ; 3000K, 4000K

Tested with Clipsal, Schneider,  
Imitos Rotary Dimmer

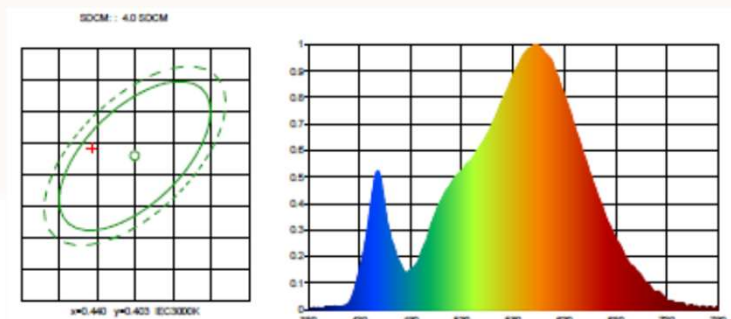


## GU 10 LED / 5W / 7W / 7W Dim



## Suitable for Enclosed Fitting EL-K-GU10-5W/E

5W, 35 degree, 500lm, Non Dimmable

CCT ; 3000K, 4000K

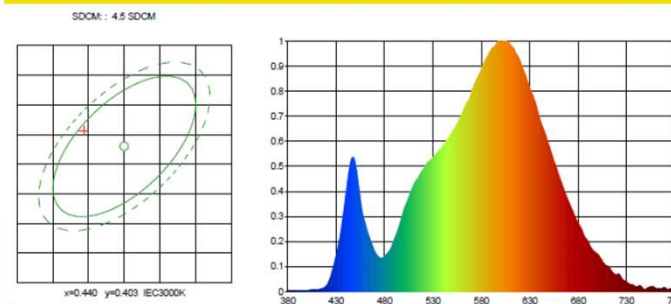

Built for Consistent Performance

**IT'S DIFFERENT**

**Long lifespan 25,000  
hrs**

**PAR20-7W LED**  
**PAR30-13W LED**

**Base : E27**

**Voltage 185-265V / 50 Hz**

**Lifespan : 25,000 Hrs**

**Angle : 35 Deg**

**IP20, CRI 80, PF 0.5, Non Dimmable**

**CL-K-PAR20-7W**

Power / lm : 7W / 550lm

CCT : 3000K, 4000K

Dimension : D63 x H85mm


Packing/ctn 50pc, 2.90kg, 0.026cbm



PAR20 E27



PAR30 E27

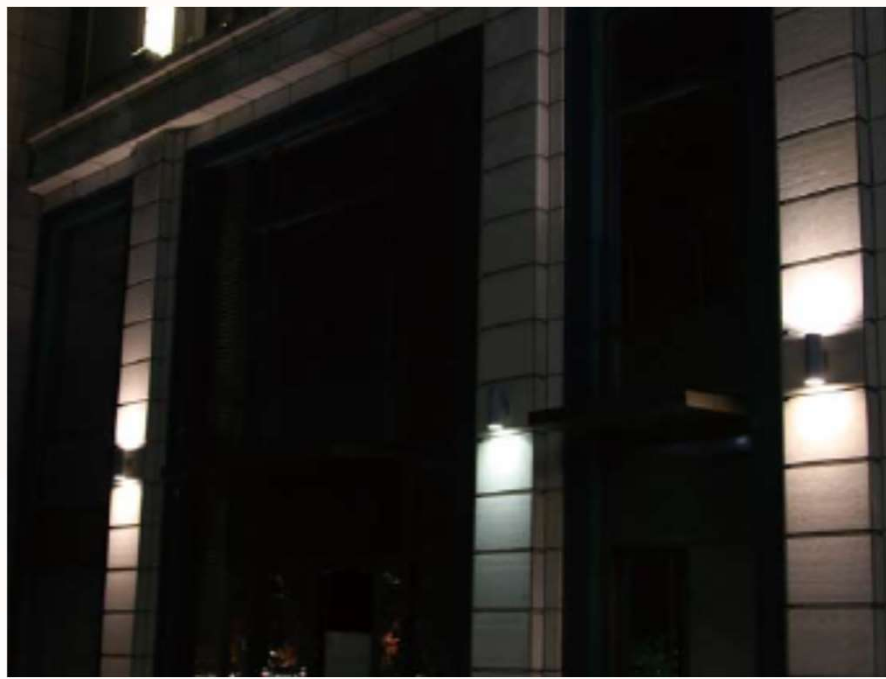

**CL-K-PAR30-13W**


Power / lm : 13W / 1050lm

CCT : 3000K, 4000K, 6500K


Dimension : D95 X H115mm

Packing/ctn : 20pc, 3.45kg, 0.043cbm

SDCM: : 1.3 SDCM

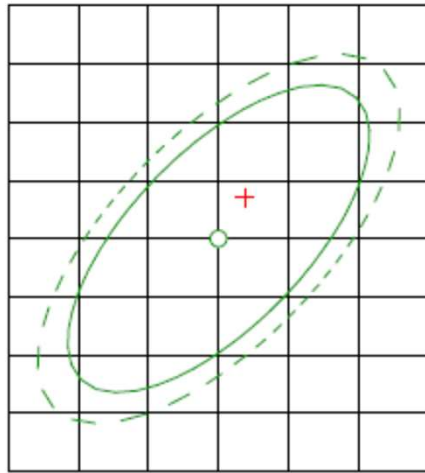

x=0.380 y=0.380 IEC4000K

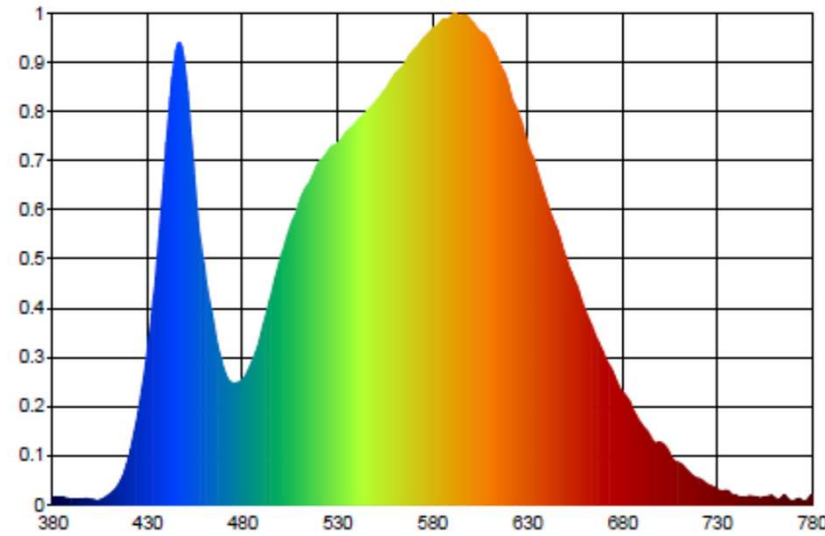


## PAR20-7W LED


## PAR30-13W LED

PAR 20/7W NW

SDCM: : 1.2 SDCM

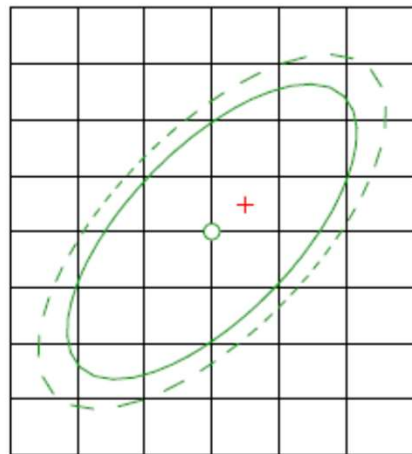

x=0.380 y=0.380 IEC4000K

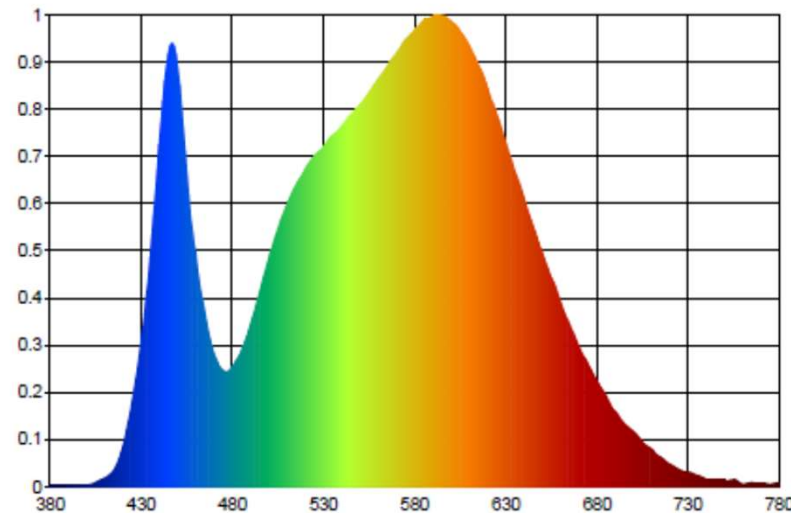

PAR 30/13W NW

IT'S DIFFERENT

Long lifespan



G4



G9

**G4-3W/WW LED**

**G9-3W/WW LED**

**Voltage 220-240V / 50 Hz**

**Angle : 360 Deg**

**IP20, CRI 80, Non Dimmable**

**CL-K-G4-3W/WW**

Base : G4

Power / lm : 3W / 300lm

CCT : 3000K

Dimension : D16 x H43mm

Lifespan : 25,000 Hrs

Packing/ctn 1000pc, 13.5kg, 0.025cbm

**CL-K-G9-3W/WW**

Base : G9

Power / lm : 3W / 300lm

CCT : 3000K

Dimension : D16 X H50mm

Lifespan : 20,000 Hrs

Packing/ctn : 1000pc, 17kg, 0.04cbm



## GX 53 LED

### Wide Applications

**Perfect for under cabinet, closet,  
showroom lightings, corridors,  
Bookcase lighting etc**

### **CL-K-GX53-6W-120D-3000K**

Base : GU10

Power: 6W, Voltage: 185-264/50Hz

CCT: 3000K , approx. 500lm


Angle : 120 deg,

IP 20, CRI 80, Non Dimmable

Dimension : H24 x Ø75mm

Lifespan : 15,000 Hrs

Packaging/ctn : 100pcs, 4.50kg,  
0.024cbm

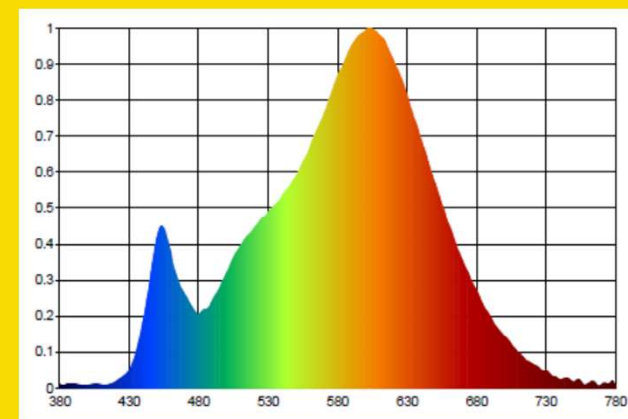

Built for Consistent Performance



30W E27



50W E40

**IT'S DIFFERENT**

**Long lifespan 25,000  
hrs**



## **CL-K-T3S-30W/DL**

## **CL-K-T3S-50W/DL**

### **Features :**

Die cast aluminum for fast heat dissipation to promote long lifespan.

Slope anti-dust design, effectively avoid dust accumulation and increase heat dissipation.

Beam angle 180deg will light up larger surface areas and suitable for low bay applications such as garages, warehouses, worksites, hotels, sitting rooms, stations, shopping malls.

**Voltage 175-265V, CRI 80, IP20**

**Non Dimmable, 15,000hrs lifespan,**

**Die cast Aluminium and Plastic**

### **CL-K-T3S-30W/4000K**

### **CL-K-T3S-30W/6500K**

Power / lm : 30W / 2700lm

Lampholder : E27

Dimension : D100 x H171mm

Packing/ctn 20pc, 6.31kg, 0.048cbm

### **CL-K-T3S-50W/6500K**


Power / lm : 50W / 4500lm

Lampholder : E40

Dimension : D135 x H241mm


Packing/ctn : 8pc, 5.26kg, 0.05cbm

## Spectrum


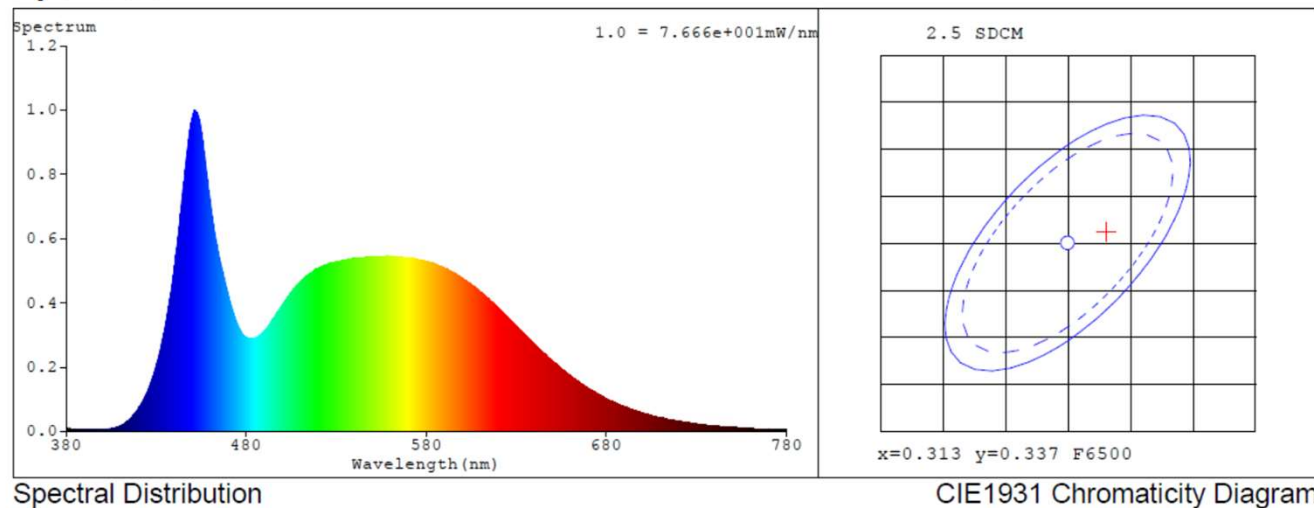


T3S-30W/DAYLIGHT 6500K

## Spectrum

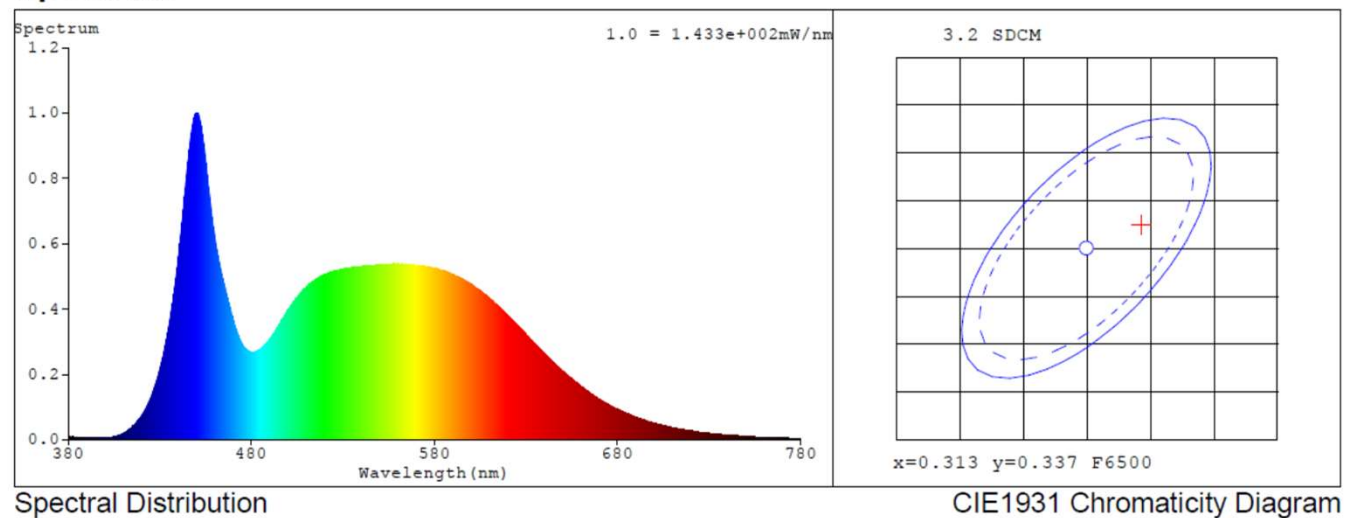

T3S-50W/DAYLIGHT 6500K

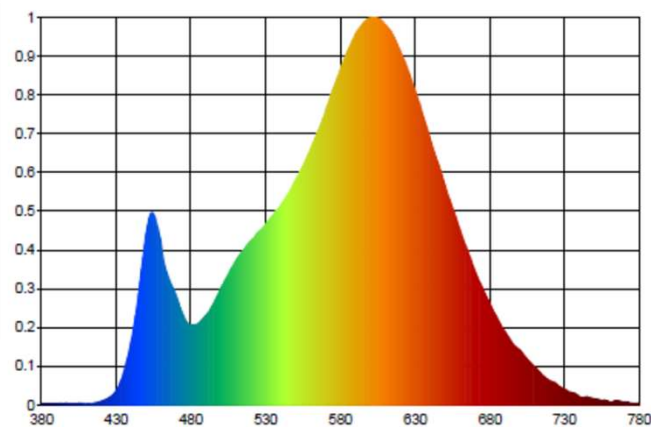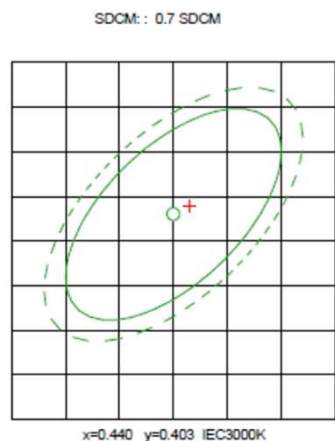

## AR111/13W 3000K LED

### Wide Applications

Retrofit for retail outlets and commercial units, showroom lightings, corridors

### CL-KL2AR111-13W-24D-3000K

Base : GU10

Power: 13W, Voltage: 185-264/50Hz

CCT: 3000K , approx. 1350lm

Angle : 24 deg,

PF 0.9, IP 20, CRI 80, Non Dimmable

Dimension : H75 x Ø111mm

Lifespan : 25,000 Hrs

Material : Aluminium Alloy and high thermal conductive plastic

Packaging/ctn : 20pcs, 3.80kg, 58.7\*24.2\*19cm

