

FEATURES :


- Relatively simple design concept which can be applied in many lighting applications.
- Aluminium body.
- Joinable to required length
- Single sided down beam. Enhanced PCB Board which are replaceable.
- Reliable and durable Osram Led and high performance BOKE (minimal flicker driver), 50,000 hours.
- DALI and 1-10V dimmng are optional.



APPLICATIONS

Ideal for homes, schools, offices, walkways, gym, supermarkets

Model	Power (W)	Led Brand / Type	Beam Angle	Lumen (Lm)	Dimension (mm)	Output AC	Driver / PF	Finish
EL-3380F	30W	Osram 3030	45 Deg	3000	L1200*W33*H80	200-240V	Boke/ PF 0.9	Black /White

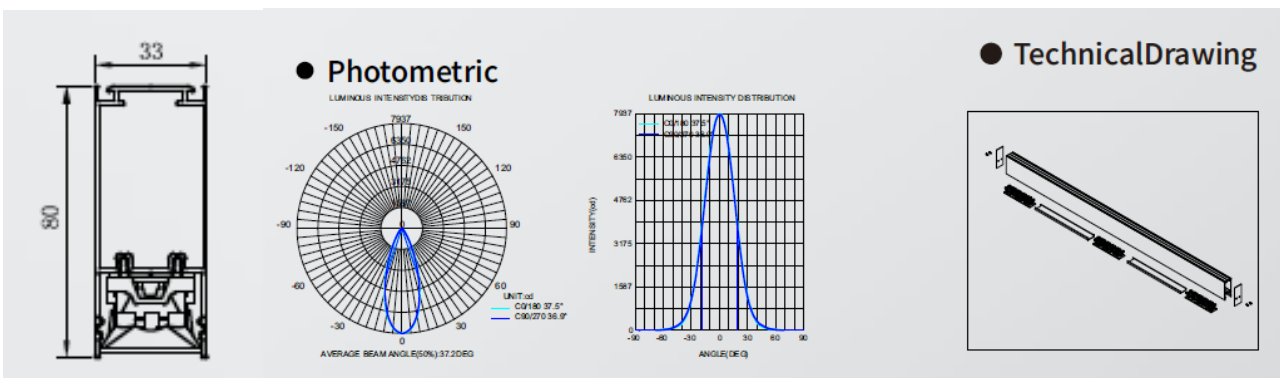

JOINING IS OPTIONAL

